



**Technical Bulletin:**  
**Side Rail Cover**

**Technical Data & Test Results**

- 100% Exterior Grade Polymeric Compound
- UV Stable passes 4500 hours Xenon Test
- Shore D Hardness: 79 ASTM D2240
- Tensile Strength: 6000 psi ASTM D638
- Flexural Strength: 11,000 psi ASTM D790
- Passes 5-year actual Florida/Arizona UV exposures
- Coefficient of Linear Expansion:  $3.6 \times 10^{-5}$  in/in/°F  
ASTM D696

**Available Colors:**

- White, Ivory, Beige

**Sizes Available:**

- 8 ft. lengths (2.4 meters)
- Other longer sizes are available upon request (Minimum order)

**Packaging:**

- Bundles of 10




**Description**

- Side rail or guide rail cover
- Dimensions: 3 inches x 1.1 inches (7.6 cm x 2.8 cm)
- Attached by High Performance 3M Adhesive Tape
- 100% Exterior Grade Polymeric Compound
- Thickness: .030 inches (.76 mm)

**Features**

**Benefits**

- Covers side or guide rail.....No plug buttons, less labor to install
- Available in colors.....Stock only one color of rail, reduce inventory
- Superior finish.....Beautiful look for customers
- 3M Tape (no screws).....Easy to install, outstanding strength
- Speed of installation.....Faster to install than plug buttons
- Polymeric material.....Will not corrode

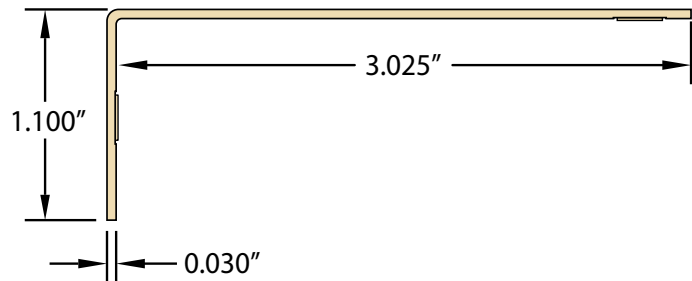

**Innovative protective products, LLC™**

Jensen Beach, FL • Tel: 888-6 SPLATS • Fax: 954.772.7110 • [www.splatslats.com](http://www.splatslats.com)

*IPP Products are manufactured to ISO9002/QS9000 standards.*